


MOTORI ANTIDEFLAGRANTI EEx-d versione II B

FLAMEPROOF MOTORS

MOTEUR EEx-d

COPRIM - ITALY

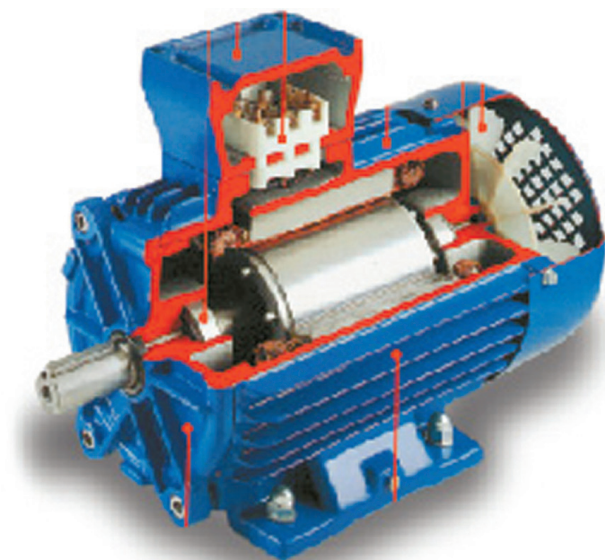

**Motori a prova di esplosione
secondo le Norme Europee
Cenelec EN 50014 - 50018**

Flameproof motors in according
with European Standards Cenelec
EN 50014 - 50018


Moteur à pruve d'explosion
selon les règles Européennes
Cenelec EN 50014 - 50018

- Completamente chiusi e autoventilati
Completly closed and self-ventilated
Complètement fermé
- Carcassa IP 55
IP55 frame
Carcasse IP55
- Alimentazione europea 220/380 V trifase - 50 Hz
European power three-phase supply
Alimentation européens en trois phases
- 1450 giri / min
- Temperatura d'impiego - 20 + 60 °C
Working temperature range
Température d'emploi

A RICHIESTA VERSIONE TROPICALIZZATA

TROPICAL VERSION ON REQUEST

SUR DEMANDE VERSION TROPICALISÉE

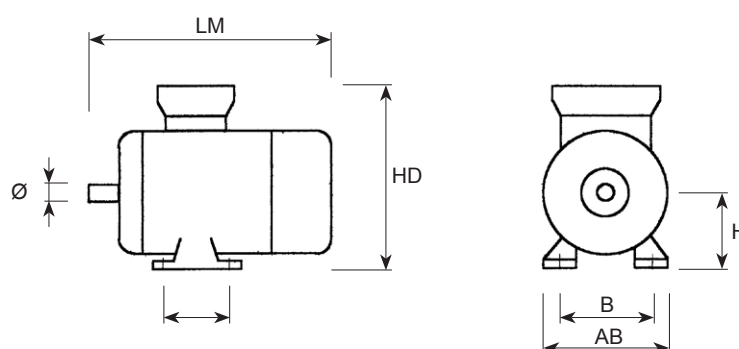

Kw	LM	HD	B	A	AB	H	Ø	Cod.
1,1	413	264	100	140	175	90	24	7.01.20
4	512	318	140	190	235	112	28	7.01.10
5,5	557	398	140	216	272	132	38	7.01.11
7,5	632	398	178	216	272	132	38	7.01.14
11	730	453	210	254	318	160	42	7.01.15
15	730	453	254	254	318	160	42	7.01.16
22	860	506	279	279	350	180	48	7.01.22